

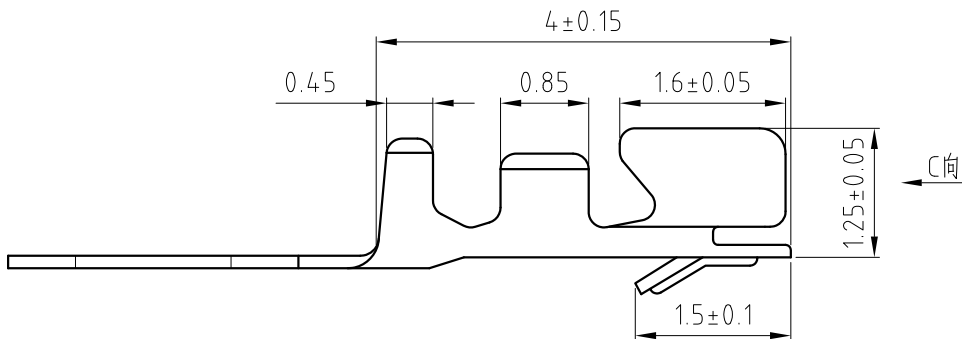



剖面 A-A

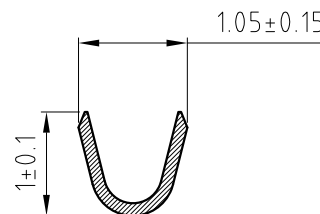

剖面 B-B

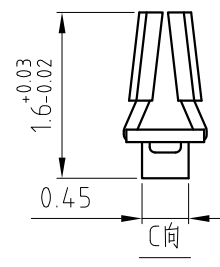

Specifications:
Operating Voltage: 50V AC/DC
Current Rating: 1A AC/DC
Withstand Voltage: 250V AC/Minute
Contact Resistance: $\leq 30\text{m}\Omega$
Insulation resistance: $\geq 100\text{m}\Omega$
Operating Temperature: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Material: Phosphoric copper Tin-plated
Applicable Wire Sizes: AWG32# ~ 28#

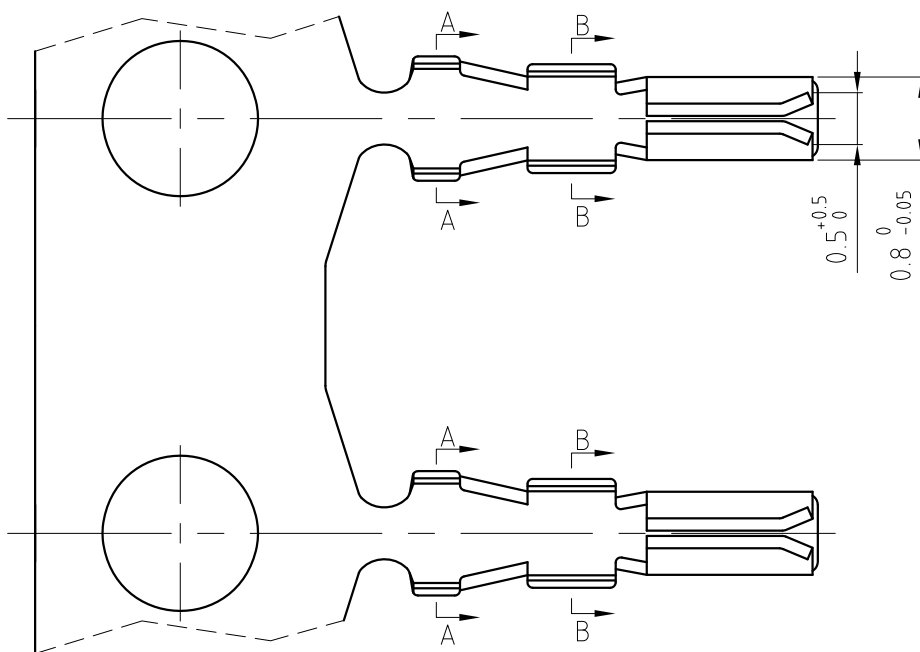

修订 REV	修改摘要 REVISION DESCRIPTION	日期 DATE	签名 SIGNATURE
-	-	-	-

一般公差 TOLERANCES X. ± 0.40 .XX ± 0.20 .X ± 0.30 .XXX ± 0.10 ANGLES $\pm 2^{\circ}$		深圳市宏利电子有限公司 Shenzhen Holy Electronic Co.,Ltd			
检验尺寸标示 SYMBOLS $\oslash$ $\ominus$ INDICATE CLASSIFICATION DIMENSION $\oslash$ MARK IS CRITICAL DIM. $\ominus$ MARK IS MAJOR DIM.		工程 图号	SH10TE	制图 (DR) '10/03/22	
品名		SH1.0 端子	审核 (CHKD)		
TITLE		SH1.0mm Pitch Terminal	核准 (APPD) Rigo Lu		
表面处理 (FINISH)	比例 (SCALE) 1:1	单位 (UNITS) mm	张数 (SHEET) 1 OF 1	SIZE A4	REV 0