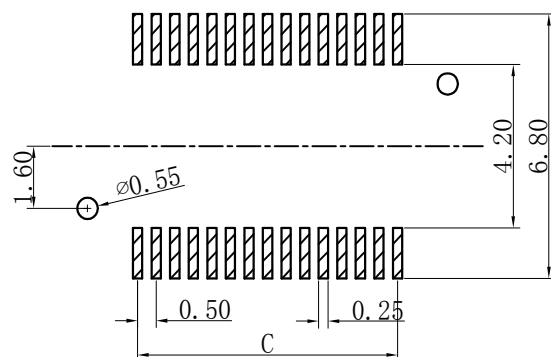
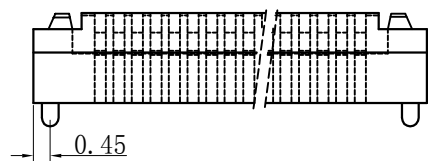
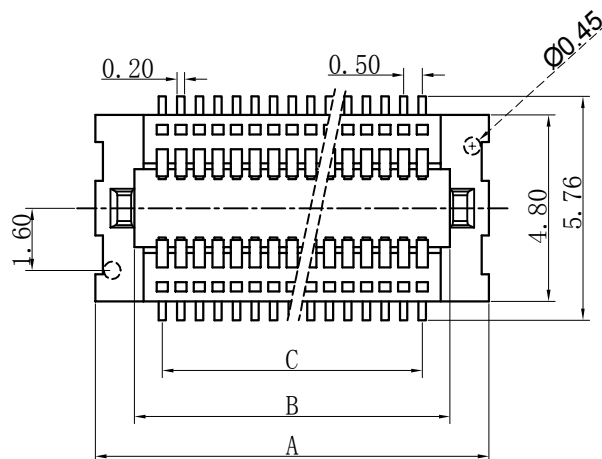



PCB 寸法

Specifications:
Housing: LCP UL94-V0 Color: Nature
Contact: Phosphor Bronze Gold Plated
Operating Voltage: 50V AC/DC
Current Rating: 0.5A AC/DC
Withstand Voltage: 500V AC/Minute
Contact Resistance: $\leq 40\text{m}\Omega$
Insulation resistance: $\geq 100\text{m}\Omega$
Operating Temperature: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

P 数	寸			P 数	寸		
	A	B	C		A	B	C
004	5.10	3.00	1.50	033	19.60	17.50	16.00
005	5.60	3.50	2.00	034	20.10	18.00	16.50
006	6.10	4.00	2.50	035	20.60	18.50	17.00
007	6.60	4.50	3.00	036	21.10	19.00	17.50
008	7.10	5.00	3.50	037	21.60	19.50	18.00
009	7.60	5.50	4.00	038	22.1	20.00	18.50
010	8.10	6.00	4.50	039	22.60	20.50	19.00
011	8.60	6.50	5.00	040	23.10	21.00	19.50
012	9.10	7.00	5.50	041	23.60	21.50	20.00
013	9.60	7.50	6.00	042	24.10	22.00	20.50
014	10.10	8.00	6.50	043	24.60	22.50	21.00
015	10.60	8.50	7.00	044	25.10	23.00	21.50
016	11.10	9.00	7.50	045	25.60	23.50	22.00
017	11.60	9.50	8.00	046	26.10	24.00	22.50
018	12.10	10.00	8.50	047	26.60	24.50	23.00
019	12.60	10.50	9.00	048	27.10	25.00	23.50
020	13.10	11.00	9.50	049	27.60	25.50	24.00
021	13.60	11.50	10.00	050	28.10	26.00	24.50
022	14.10	12.00	10.50	051	28.60	26.50	25.00
023	14.60	12.50	11.00	052	29.10	27.00	25.50
024	15.10	13.00	11.50	053	29.60	27.50	26.00
025	15.60	13.50	12.00	054	30.10	28.00	26.50
026	16.10	14.00	12.50	055	30.60	28.50	27.00
027	16.60	14.50	13.00				
028	17.10	15.00	13.50				
029	17.60	15.50	14.00				
030	18.10	16.00	14.50				
031	18.60	16.50	15.00				
032	19.10	17.00	15.50				

一般公差 TOLERANCES X: +0.40 XX: +0.20 .X: +0.30 .XX: +0.10 ANGLES ±2°		深圳市宏利电子有限公司 Shenzhen Holy Electronic Co.,Ltd	
检验尺寸标示 SYMBOLS   INDICATE CLASSIFICATION DIMENSION		TITLE 0.5mm Pitch Board To Board FOR SMT CONN	
 MARK IS CRITICAL DIM.  MARK IS MAJOR DIM.		品名 0.5mm BTB - 2*1P H2.5 母座 带柱	
表面处理 (FINISH) _____		比例 (SCALE) 1:1 单位 (UNITS) mm 	
		张数 (SHEET) 1 OF 1 SIZE A4 REV 0	

	-	-	-
修订 REV	修改摘要 REVISION DESCRIPTION	日期 DATE	签名 SIGNATURE